

## Process Panel Meter Model PAX-P

Microprocessor controlled  
Accuracy 0,03% F.S.  $\pm 1$  digit

### Features

- 5 digit LED display, 14 mm high
- Input signal 0/4-20 mA and 0-10 VDC
- Display update rate up to 20 / sec
- Optional boards for analog output, alarm contacts and serial output
- Easy to set up from font panel or with PC
- Protection IP65

### Ranges

0 ... 20 mA  
0 ... 10 VDC

### Application






Display, power supply and signal utilization for all pressure transmitters and other devices with standard current or voltage output



Technical specifications	PAX-P
Measuring principle	Microprocessor controlled with 16 bit A/D converter
Range [mA]	20 mA (-2 ... 26 mA)
Overload [mA]	150
Range [VDC]	10 VDC (-1 ... 13 VDC)
Overload [VDC]	300
Display update rate	Up to 20 / sec
Display	5-digit LED, 14 mm high
Unit label	Software controlled units label backlight
Case material	High impact plastic
Power supply	85 ... 250 VAC / 50/60 Hz, optional 11 ... 36 VDC or 24 VAC $\pm 10\%$
Power consumption	15 VA or 11 W
Power supply for transmitter	24 VDC $\pm 5\%$ , stabilized, max. 50 mA
Accuracy	0,03% (from 18 up to 28°C) 0,12% (from 0..50°C)
Integrated functions	Max/Min reading memory, Totalizer, digital filter, 2 ... 16 points custom linearization
Serial output	Optional board RS-232
Isolation voltage	500 VDC to user commons
Analog output	Optional board with selectable output signal 0/4-20 mA or 0-10 VDC
Accuracy	0,17% (10 ... 28°C), 0,4% (0 ... 50°C)
Repeatability	3500 digits
Max. loop resistance	500 $\Omega$ at 10 VDC
Isolation voltage	500 VDC to user commons
Alarm contacts	Optional boards
Max. current	- with 2 alarm contacts (form C relays) 5 A at 120/230 VAC or 28 VDC (resistive loads), at 120 VAC max. 80 VA (inductive loads) - with 4 alarm contacts (form A relays) 3 A at 250 VAC or 30 VDC (resistive loads), at 120 VAC max. 80 VA (inductive loads)
Response time (0 ... 99%)	$\leq 200$ ms
Permissible	
Operation temperature	0 ... 50°C
with 3 option boards)	0 ... 45°C
Storage temperature	-40 ... 60°C
Compensated temperature range	0 ... 50°C
Low frequency noise rejection: NMR	> 60 db at 50/60 Hz $\pm 1\%$
Common mode: CMR	> 100 db, DC up to 120 Hz
CE-mark/EMC	Emission acc. EN 50 081-1 (March 1993) Immunity acc. EN 50 082-2 (March 1996)
Electrical connections	Fixed terminals
Protection according EN 60 529/IEC 529	IP65
Weight [kg]	0,3 (without optional boards)
Accessories, Options	Unit labels, setup software for Windows

All specifications are subject to change without notice.


## General dimensions [mm]

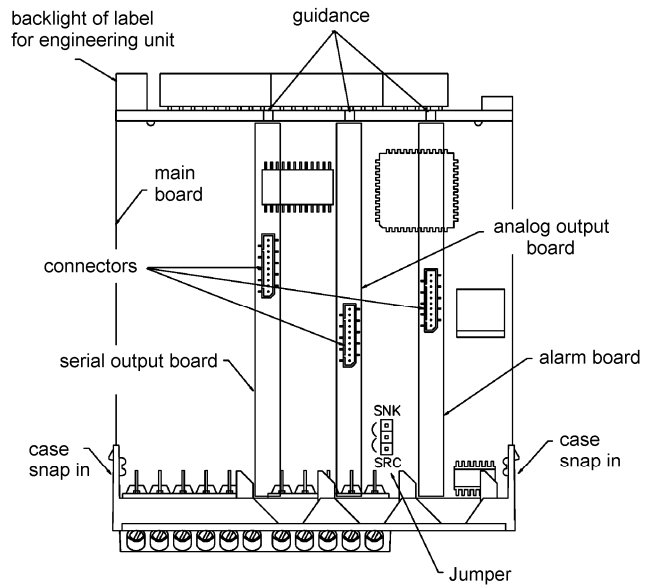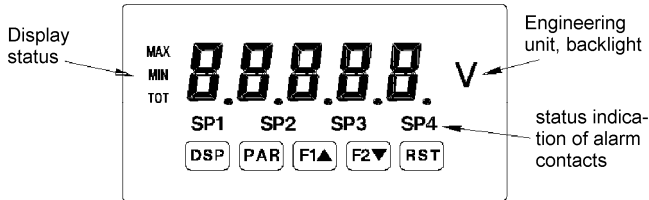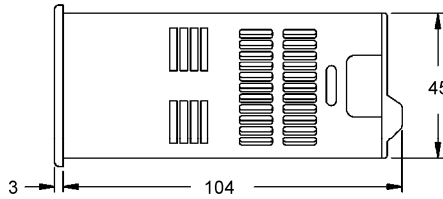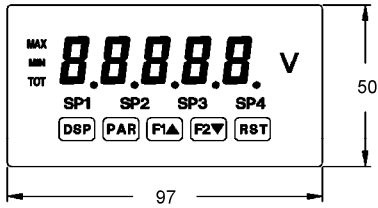

## Electrical connection

### Base Unit (PAXP0000):

1	AC	85 - 250 VAC
2	AC	50/60 Hz
3	10 V	input voltage
4	20 mA	input current
5	COMM.	input common
6	+24 VDC	power supply 24 VDC/50 mA
7	COMM.	user input common
8	USER1	digital user input 1
9	USER2	digital user input 2
10	USER3	digital user input 3
11	N/C	not used

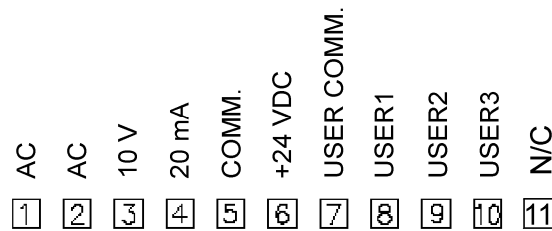

## Order information

Type	Input signal	Range	Eng. unit	Power supply	Alarm contacts	Analog output	Serial output	Options
PAX-P	(01) 0/10 VDC	acc. range of transmitter	BAR MBAR KG/CM2 PSI INHG PA KPA MPA  others on request	(A) 24 VDC	(=) without	(=) without	(=) without	(PRG) Windows-set up software  (ETI) Labels with engineering units
	(05) 0/5 VDC			(B) 85..230 VAC	(GK2) 2 alarm contacts (relays form C)	(A42) 4-20 mA	(RS) RS-232	
	(15) 1/5 VDC				(GK4) 4 alarm contacts (relays form A)	(A01) 0-10 VDC		
	(16) 1/6 VDC							
	(20) 0/20 mA							
	(42) 4/20 mA						RS485 on request	

## How to order

Type	Input signal	Range	Engineering unit	Power supply	Alarm contacts	Analog output signal	Serial output	Options
PAX-P	42	-1/9	BAR	B	GK2	A01	RS	PRG

## Ashcroft Instruments GmbH

Germany  
Max-Planck-Str. 1, D-52499 Baesweiler  
P.O. Box 11 20, D-52490 Baesweiler  
Tel.: +49 (0) 2401 808-0, Fax: +49 (0) 2401 808-125

France  
„206“ ZA Le Mandinet Rue des Campanules  
F-77185 Lognes  
Tel.: +33 (0) 1 60 37 25 30, Fax: +33 (0) 1 60 37 25 39

Website: [www.ashcrofteurope.com](http://www.ashcrofteurope.com) e-Mail: [sales@ashcrofteurope.com](mailto:sales@ashcrofteurope.com)

United Kingdom  
Unit 5 William James House  
Cowley Road, Cambridge CB4 0WX  
Tel.: +44 (0) 12 23 39 55 00, Fax: +44 (0) 12 23 39 55 01