

Single diaphragm differential pressure gauge Model D101

Max. static pressure 25 bar

Nominal size 100 mm, 115mm or 150 mm
Accuracy: Class 2.5(2.5%)

Features

- Stainless steel case and wetted parts
- Static pressure 25 bar
- Protection IP65
- Dry or liquid filled

Ranges

0 ... 250 mmWC up to 0 ... 10 kg/cm²

Applications


Chemical and petrochemical industry
Machine and apparatus construction
Food and beverage industry
Pulp and paper industry

Technical specification	D101		
Dial size [mm]	100	115	150
Construction	Cylindrical case with bayonet ring.		
Measuring principle	Diaphragm, safety design, solid front not required		
Range [mmWC]	250 400 600 1000 1600 2500 4000 5000		
[kg/cm ²]	0,6 1 1.6 2.5 4 6 10		
Max. static pressure [kg/cm ²]	25 bidirectional only		
Overload capability	130 % F.S., short time		
Pressure type	Differential		
Process connection	1/4" 1/2" NPT (F), 1/4" 3/8" 1/2" BSP / NPT (M), M20x1.5(M), others on request		
Connection location	Lower		
Material			
Pressure connection	Stainless steel 316		
Pressure chamber	Stainless steel 316, Viton-ring		
Measuring membrane	Stainless steel 316L		
Case/bayonet ring	Stainless steel 304, optional 316L		
Window	Laminated safety glass optional acrylic glass		
Dial	Aluminum, black markings on white background		
Pointer	Aluminum, black, optional Micrometer Adjustment		
Accuracy calibrated ascending	Class 2.5 (2.5 % F.S.)		
Permissible			
Ambient temperature	-20 ... 80 °C		
Medium temperature	Max. 100 °C		
Storage temperature	-40 ... 60 °C		
Effect	Max. 0,3 % / 10 K		
Protection	IP65		
Filling liquids	Glycerin, silicone, others on request		
Mounting	Wall mounting, optional 2" pipe mounting, others on request		
Weight dry/filled [kg]			
Accessories, options	3 or 5 way remote or direct mounted manifolds, electric contacts		

All specifications are subject to change without notice.

IN.D101 Rev. B 25/12/2009

General dimensions in mm

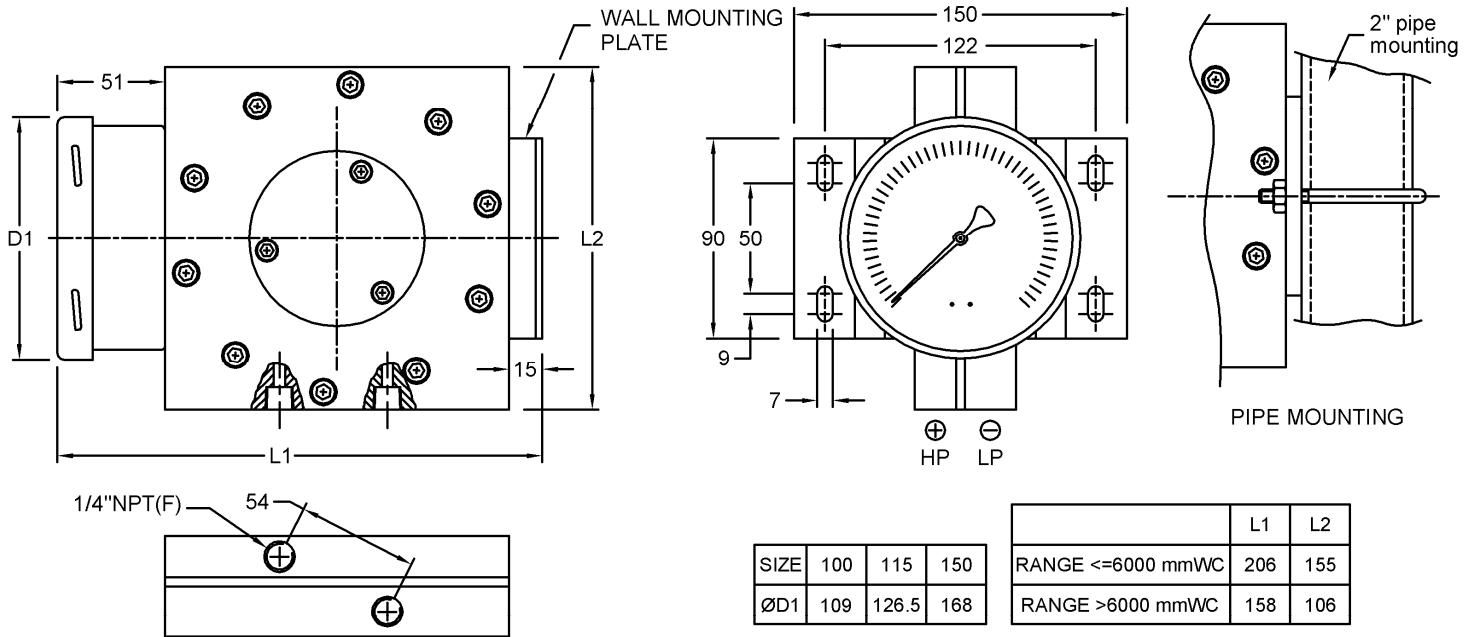

Order information

Size	Type	System material	Execution	Process Connection	Connection orientation	Range	Engineering units	Filling/Case material	Options
(100) 100 mm	D101	(S) Pressure chamber 316 and diaphragm 316L	(L) IP65	(02T) 1/4" NPT (F)	(L) Lower	0/ 250 ²⁾	(mmWC)	(=) Standard no filling	(NH) Tagging wired
(115) 115mm				(04T) 1/2" NPT (F)		0/ 400 ²⁾		(GV) Silicone	(DA) Dial Marking
(150) 150mm				(04) 1/2" NPT (M)		0/ 600		(GR) Glycerin	(CS) Dual Scale
				(03) 3/8" NPT (M)		0/ 1000	(kg/cm ²)	(OF) Oil free	(MP) Micrometer pointer
				(02) 1/4" NPT (M)		0/ 1600		(YW) Case material 316L	(PD) Acrylic glass
				(15) 1/2" BSP (M)		0/ 2500		(EC) Contact type and function (see EC.1) ¹⁾	(FW) Wall mounting bracket
				(14) 3/8" BSP (M)		0/ 4000			(TM) 2" pipe mounting
				(13) 1/4" BSP (M)		0/ 5000			
				(16) M20x1.5(M)		0/ 0,6			
				Standard (02T) others through adaptor		0/ 1			
						0/ 1,6			
						0/ 2,5			
						0/ 4			
						0/ 6			
						0/ 10			

psi and others on request

1) Specify details 2) Electrical contact not available

How to order

Size	Type	System material	Execution	Process connection	Connection orientation	Range	Engineering unit	Filling/Case material	Option
100	D101	S	L	25	L	0/600	mmWC	=	NH

Ashcroft India Pvt. Ltd.

Plot No.: 2306, G.I.D.C. Chhatral, Ta: Kalol, Dist.: Gandhinagar,
 CHHATRAL 382 729, Gujarat, INDIA.
 Telephone: +91 (0) 2764 233681/82/83 Fax: +91-2764-233440
 Email: sales@ashcroftindia.com www.ashcroftindia.com

- North Zone : sales.delhi@ashcroftindia.com
- East zone : sales.kolkata@ashcroftindia.com
- West zone : sales.mumbai@ashcroftindia.com
- South zone : sales.chennai@ashcroftindia.com