

Submersible Pressure Transmitter

Model LT11

Features

- Integrated and economical design
- Rugged stainless steel construction
- High accuracy, stability, and reliability
- Various measurement units
- Protection IP68

Ranges

0 ... 1.0 mWC up to 0 ... 200 mWC
 0 ... 5.0 ftWC up to 0 ... 500 ftWC


Applications

Level measurement in groundwater and bore
 Level measurement in rivers and lakes
 Wastewater treatment and pumping stations
 Tank Level Measurement
 Vessel and storage systems



Technical specifications	LT11	
Measuring principle	Piezo resistive sensors	
Range in mWC	1 2 5 10 15 20 30 50 75 100 125 150 200	
Range in ftWC	5 10 15 20 30 50 100 150 200 300 400 500	
Overpressure limit	2 times of FS	
Process connection	Standard welded nose cone	
Material Wetted Part		
Process connection	Stainless Steel 316L	
Diaphragm	Stainless Steel 316L	
Housing	Stainless Steel 316L	
Seals	FKM	
Power supply	11 ... 28 VDC	
Output signal	4 ... 20 mA	0 ... 5 VDC 0 ... 10 VDC
Maximum Loop Resistance	<(U - 11V)/0.02 Ω	
Electrical connection		
Cable	φ7.5mm polyethylene cable	
Accuracy	≤ 0,5 % FS (Including Linearity, Hysteresis, Zero offset & Span offset), at Room Temperature	
Long term stability		
Range > 20mWC	≤0,2 % FS / year	
Range ≤ 20mWC	20mmWC	
Permissible		
Operation temperature	-10 ... 80 °C	
Storage temperature	-40 ... 100 °C	
Thermal drift		
Range > 10mWC	0,02 % FS/°C	Offset 0,05 % FS/°C
Range ≤ 20mWC	0,05 % FS/°C	0,05 % FS/°C
Protection acc. EN 60 529/IEC 529	IP68	
Weight in kg	~ 0.28, cable weight extra	

General dimensions in mm

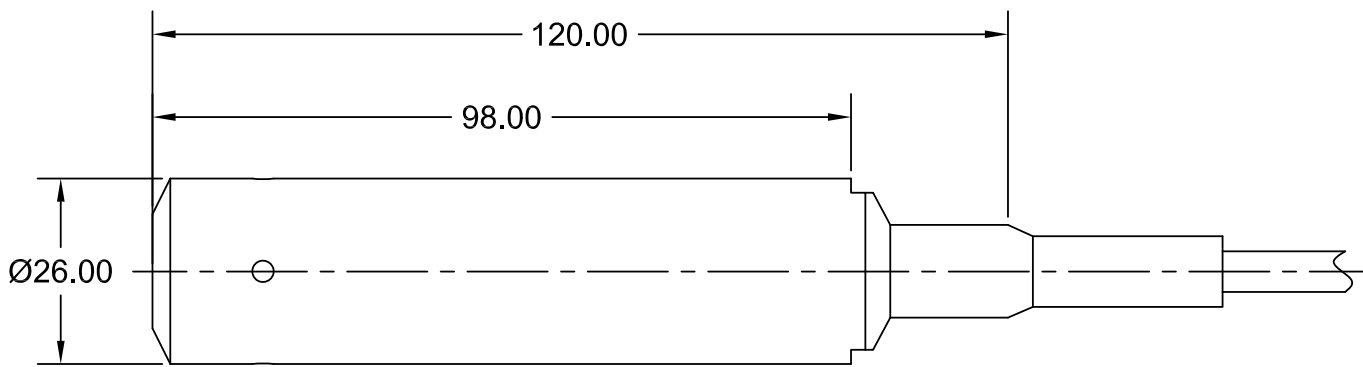

Electrical connection	
Red	+ Ve
Black	- Ve

Order information

Output signal	Accuracy	Range	Engineering unit	Protection	Process connection	Electrical connection	Options
(42) 4/20 mA	(050) $\leq 0,50\%$ (Including Linearity, Hysteresis, Zero offset & Span offset)	0/ 1	mWC	(O) IP68	(SNC) Standard welded nose cone	(XX.XM) Cable length in meter ¹⁾ (XX.XF) Cable length in feet ¹⁾ 1) specify length in meter EG. 1.0M = cable length 1.0 meter	(NH) Tagging Wired
(05) 0/5 VDC		0/ 2					
(10) 0/10 VDC		0/ 5					
		0/ 10					
		0/ 15					
		0/ 20					
		0/ 30					
		0/ 50					
		0/ 75					
		0/ 100					
		0/ 125					
		0/ 150					
		0/ 200					
		0/ 5	ftWC				
		0/ 10					
		0/ 15					
		0/ 20					
		0/ 30					
		0/ 50					
		0/ 100					
0/ 150							
0/ 200							
0/ 300							
0/ 400							
0/ 500							
others on request	others on request	Equivalent ranges bar, psi and others units available					

How to order

Type	Output signal	Accuracy	Range	Engineering unit	Protection	Process connection	Electrical connection	Option
LT11	42	050	0/5	mWC	O	SNC	1.0M	NH

Precision Mass Products Pvt. Ltd.

Plot No.: 2306, G.I.D.C. Chhatral, Ta: Kalol, Dist.: Gandhinagar, Chhatral -382729, Gujarat, India.

Telephone: +91-2764 233681/82/83

Email: sales@precisionmass.com

Fax: +91-2764-233440

www.precisionmass.com

- North Zone : sales.delhi@precisionmass.com
- East zone : sales.kolkata@precisionmass.com
- West zone : sales.mumbai@precisionmass.com
- South zone : sales.chennai@precisionmass.com